



MODEL 161 SIGNAL CONDITIONER

APPLICATIONS

- Instrumentation Labs
- Field Testing
- Process Monitoring
- Vibration & Shock Testing

FEATURES

- Interface with Charge and IEPE Transducers
- 4 channels, Accel, Vel, and Disp Output
- Battery Power Option
- Wide Bandwidth, Low Noise
- Low and High Pass Filter Settings
- Support IEEE 1451.4 TEDS

SPECIFICATIONS

- 4-Ch IEPE & Charge Amplifier/Conditioner
- Acceleration, Velocity, Displacement Output
- Built-in Low-Pass & High-Pass Filters
- 100kHz Bandwidth
- AC or Battery Power Operation

The **Model 161** series is a 4-channel signal conditioning amplifier designed to be used with piezoelectric accelerometers (IEPE or Charge) and most other piezoelectric based transducers. The Model 161 series incorporates front-panel controlled gain adjustments, multiple high-pass and low-pass filter settings, and it is capable of displaying IEEE 1451.4 TEDS information. The signal conditioner features broad bandwidth to 100kHz and 10Vpeak linear output. For various vibration applications where velocity and displacement information are desired, analog integration functions are included as output options with a push of a button.

The Model 161A is 110/220VAC powered, and includes a mating power adaptor.



MODEL 161 SIGNAL CONDITIONER

PERFORMANCE SPECIFICATIONS

INPUT SPECIFICATIONS	
Charge Input	<100,000pC, Single ended, BNC input connector
Charge Input Sensitivity Range	0.001pC/unit to 999.0pC/unit (unit may be g, m/s ² , etc.)
Charge, Source Capacitance	<30,000pF
Charge, Source Resistance	>10 MΩ
IEPE Input	<22 Volts (AC+DC components), Single ended, BNC input connector
IEPE Input Sensitivity Range	0.01mV/unit to 999.0mV/unit (unit may be g, m/s ² , etc.)
IEPE Current Excitation	4mA
IEPE Compliance Voltage	24 Volts
IEPE Input Impedance	>100 MΩ, 30,000pF
OUTPUT SPECIFICATIONS	
AC Voltage	Single ended (referenced to signal ground), short circuit protected, BNC output connector
Output Impedance	<100 Ohms
Output Current	35mA max
Linear Output	±10V peak
DC Offset	20mV max (10Hz – 100KHz, 10V/unit)
TRANSFER CHARACTERISTICS	
Output Sensitivity Range Settings	Charge : 100μ, 316μ, 1m, 3.16m, 10m, 31.6m, 100m, 316m, 1, 3.16, 10 (V/unit)
	IEPE: 100μ, 316μ, 1m, 3.16m, 10m, 31.6m, 100m, 316m, 1 (V/unit)
Accuracy	±0.5% of full scale (max), at 1kHz, filters disabled, gain >1
Linearity	±0.1% of full scale, best fit straight line at 1kHz reference
Noise	Measurement Condition : Internal 10KHz low pass filter is enabled. Charge : 0.062 pC rms (RTI) plus 0.004 pC rms per 1000pF of source capacitance ref to input. IEPE : 110uV rms referred to input. Input shunted with a 249Ω resistor.
Frequency Response	0.1 Hz to 100 kHz (full power band width), -3db referenced to 1kHz
Low-pass Filter (-3dB corner)	100Hz, 1kHz, 3kHz, 10kHz, 30kHz, 100kHz
High-pass Filter (-1dB corner)	0.1Hz, 1Hz, 3Hz, 10Hz
Crosstalk Between Channels	100 db RTI
POWER REQUIREMENTS	
Voltage	18-24VDC from supplied 110/220VAC power adapter
Power dissipation	12W typical
PHYSICAL CHARACTERISTICS	
Weight & Size	2.85kg (6.28lbs); H x W x D: 115 (4.5) x 180 (7.1) x 310 (12.2) mm (inches)
Case Material	Anodized aluminium
Operating Environment	0°C to +75°C, <90% Relative Humidity

MODEL 161 SIGNAL CONDITIONER

LAYOUT

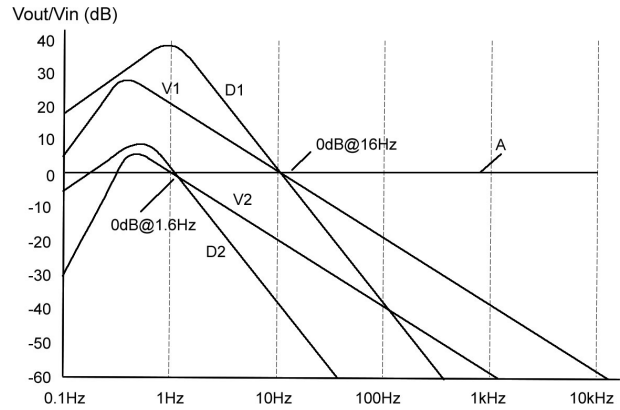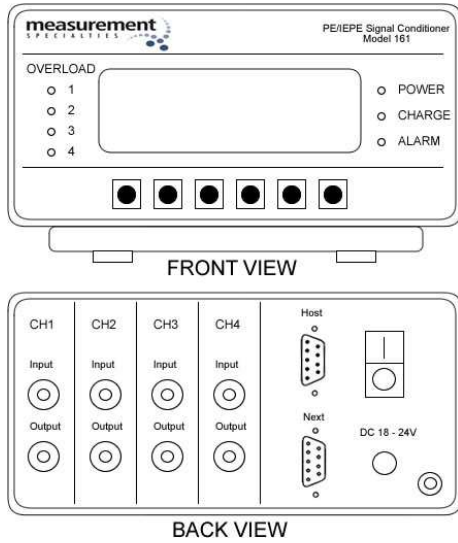

The velocity and displacement signals are obtained from single and double integrations of the acceleration signal. Piecewise integral method is used to calculate velocity and displacement output.

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
161A	IEPE & PE Signal Conditioner, 110/220VAC
161B	IEPE & PE Signal Conditioner, 110/220VAC and Rechargeable Battery Option
OPTIONAL ACCESSORIES	DESCRIPTION
AC-G03294	10-32 Microdot to BNC input adaptor for charge type transducer



株式会社 クローネ

■カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。
 ■製品のデザイン、仕様等などは、予告なく変更する場合があります。

本 社：〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698
 大阪支店：〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360
 e-mail: sales-tokyo@krone.co.jp URL: <https://www.krone.co.jp>

te.com/sensorsolutions

BetaCurve, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.