



Pressure transmitter

Relative pressure transmitter Type 525



The pressure transmitter type 525 has a compact and robust design and a very high measurement accuracy. The pressure transmitter with its large variety of pressure and electrical connection has also pressure ranges from 50 mbar full scale.

The compact 525 pressure transmitter is based upon the well proven ceramic technology developed by Huba Control over 20 years ago.

Pressure range
0 ... 0.05 – 0.6 bar

- + Very high measurement accuracy
- + Excellent thermal characteristic
- + Pressure ranges from 50 mbar full scale available
- + Compact and rugged construction
- + Large selection of connections available

Technical overview

Pressure range

Relative 0 ... 0.05 – 0.6 bar

Operating conditions

Medium		Liquids and gases
Temperature	Medium	FPM -15 ... +85 °C
		EPDM -25 ... +85 °C
		NBR -20 ... +85 °C
	Ambient	-25 ... +85 °C
	Storage	-40 ... +85 °C
Tolerable overload / rupture pressure		2 bar
Tolerable negative pressure		-0.3 bar

Materials

Plug accommodation		Polyarylamide 50% GF UL 94 V-0
Materials in contact with medium	pressure connection	Stainless steel 1.4404 / AISI 316L
	measuring element	Ceramics Al ₂ O ₃ (99.6%)
	sealing material	FPM, EPDM, NBR

Electrical overview

2 wire	Output	Power supply	Load	Current consumption
	4 ... 20 mA	10 ... 30 VDC	$< \frac{\text{supply voltage} - 10 \text{ V}}{0.02 \text{ A}}$ [Ohm]	< 23 mA
3 wire	0 ... 5 V	7 ... 33 VDC	>10 kOhm / < 100 nF	< 5 mA
	0 ... 10 V	12 ... 33 VDC	>10 kOhm / < 100 nF	< 5 mA
	ration. 10 ... 90%	5 VDC ± 10%	>10 kOhm / < 100 nF	< 5 mA
Polarity reversal protection		Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.		
Insulation voltage		500 VDC		

Dynamic response

Start-up time	< 200 ms
Response time	< 150 ms
Load cycle	< 100 Hz

Electrical connection

Electrical connection	Protection standard	Protection class
Connector DIN EN 175301-803-A	IP 65	III
Connector DIN EN 175301-803-C (Industrial standard 9.4 mm)	IP 65	III
Connector M12x1	IP 67	III
Swift connector without or with cable 1.5 / 2 / 3 / 5 m (PVC spez.)	IP 67	III


Pressure connection

Inside thread	G ¼	with Profile seal ring in FPM
	¼ -18 NPT	
Outside thread	R ¼	nach EN 10226
	G ⅜	sealed at front
	G ½	sealed at back DIN 3852-E with Profile seal ring in FPM
	G ¼	sealed at front
	G ¼	sealed at back DIN 3852-E with Profile seal ring in FPM
	G ½	sealed at front
	G ½	sealed at back DIN 3852-E with Profile seal ring in FPM, with hole Ø11 mm

Installation arrangement

Unrestricted (Note the position error!)

Tests / Admissions

Electromagnetic compatibility	CE conformity acc. EN 61326-2-3
Shock acc. IEC 68-2-27	50 g, 6 ms half sine wave, all 6 directions, free fall from 1 m on concrete (6x)
Vibration nach IEC 68-2-6	20 g, 15 ... 2000 Hz, 15 ... 25 Hz with amplitude ± 15 mm, 1 Octave/min. all 3 directions, 50 constant load
UL	ANSI/UL 61010-1 acc. E325110
EAC	
Protection against explosion 	Ex II ½ G Ex ia IIC T4 Ga/Gb
(4 ... 20 mA) acc. ATEX and IECEx	Ex II ½ D Ex ia IIC T120°C Da/Db

Weight

~ 120 g



Packaging (Please state on order)

Single packaging in cardboard	accessories integrated
Multiple packaging in cardboard (25 pcs)	

Accuracy

Parameter	Unit	
Characteristic line ¹⁾ (at 25 °C)	% fs	± 0.35 ²⁾
Resolution	% fs	< 0.1
Long term stability acc. IEC EN 60770-1 max.	% fs	± 0.25
Thermal characteristic ³⁾	% fs/10K	± 0.07
Location error horizontal mounting	mbar	+ 0.1
Location error vertical mounting, pressure connection upward	mbar	+ 0.2

Test conditions: 45% rH, power supply 24 VDC
Balance position: Vertical, pressure connection down

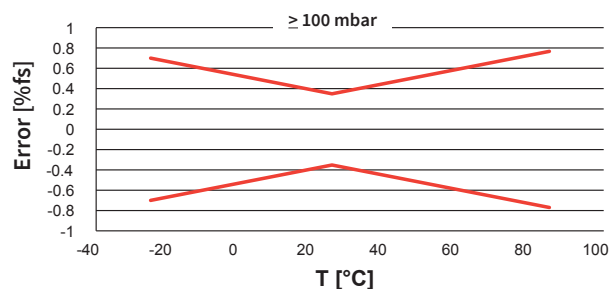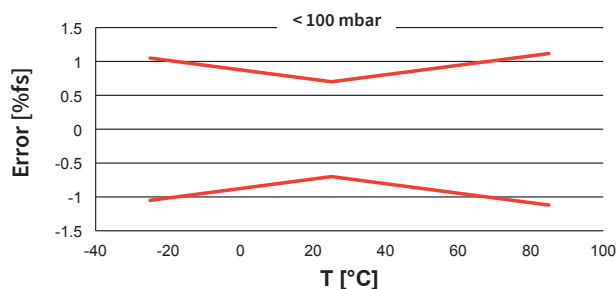

¹⁾ incl. zero point, full scale, linearity, hysteresis and repeatability

²⁾ fs < 100 mbar ± 0.7% fs

³⁾ the zero point and range at -25 ... +85 °C

			1	2	3	4	5	6	7	8	9	10	11	
Order code selection table in bar			525.	X	X	X	X	X	X	X	X	X	X	
Pressure range ¹⁾	0 ... 0.05 bar		9	2	1									
	0 ... 0.10 bar		9	2	2									
	0 ... 0.16 bar		9	2	3									
	0 ... 0.20 bar		9	2	4									
	0 ... 0.25 bar		9	2	5									
	0 ... 0.30 bar		9	2	6									
	0 ... 0.40 bar		9	2	7									
	0 ... 0.60 bar		9	2	8									
Sealing material	FPM	Fluoro elastomer				0	0							
	EPDM	Ethylene propylene				1	0							
	NBR	Butadiene Acrylonitrile				2	0							
Output / power supply	0 ... 5 V	7 ... 33 VDC						1						
	0 ... 10 V	12 ... 33 VDC						2						
	4 ... 20 mA	10 ... 30 VDC						3						
		10 ... 30 VDC							4					
	ration. 10 ... 90%	5VDC ±10%							7					
Electrical connection	Connector	DIN EN 175301-803-A ²⁾							1					
		DIN EN 175301-803-C (Industrial standard 9.4 mm) ²⁾							2					
		M12x1 ²⁾ 2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3								3				
		M12x1 ²⁾ 3w: IN=1 / OUT=3 / GND=4								1,2	M			
	swift connector	without cable (PG9)									0			
		with cable 1.5 m									L			
		with cable 2.0 m									N			
		with cable 3.0 m									Q			
		with cable 5.0 m									R			
	Pressure connection ¹⁾	Inside thread	G ¼ with O-Ring seal FPM									1	1	1
¼ -18 NPT											3	1	1	
R ¼ acc. to EN 10226											7	1	1	
Outside thread		G ½ sealed at front									M	1	1	
		G ½ sealed at back DIN 3852-E with Profile seal ring in FPM									H	1	1	
		G ¼ sealed at front									J	1	1	
		G ¼ sealed at back DIN 3852-E with Profile seal ring in FPM									4	1	1	
		G ½ sealed at front									9	1	1	
		G ½ sealed at back DIN 3852-E with Profile seal ring in FPM									8	1	1	
		G ½ sealed at back DIN 3852-E with Profile seal ring in FPM with hole Ø 11mm									S	1	1	
Pressure range variation (optional)	Indicate W and state range on order (e. g. W0... + 0.5bar/OUT0.5...4.5V)												W	

Accessories (supplied loose)	Order number
Female connector DIN EN 175301-803-A with seal	103510
Connector DIN EN 175301-803-C with seal	104244
Corner-wire box for connector M12x1	106975
Calibration certificate	104551


			1	2	3	4	5	6	7	8	9	10	11	
Order code selection in psi			525.	X	X	X	X	X	X	X	X	X	X	
Pressure range ¹⁾	0 ... 1 psi		9	B	1									
	0 ... 2 psi		9	B	2									
	0 ... 3 psi		9	B	4									
	0 ... 5 psi		9	B	6									
	0 ... 10 psi		9	B	8									
Sealing material	FPM	Fluoro elastomer				0	0							
	EPDM	Ethylene propylene				1	0							
	NBR	Butadiene Acrylonitrile				2	0							
Output / power supply	0 ... 5 V	7 ... 33 VDC						1						
	0 ... 10 V	12 ... 33 VDC						2						
	4 ... 20 mA	10 ... 30 VDC						3						
		10 ... 30 VDC							4					
	ration. 10 ... 90%	5VDC ±10%							7					
Electrical connection	Connector	DIN EN 175301-803-A ²⁾								1				
		DIN EN 175301-803-C (Industrial standard 9.4 mm) ²⁾								2				
		M12x1 ²⁾ 2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3									3			
		M12x1 ²⁾ 3w: IN=1 / OUT=3 / GND=4									1,2	M		
	Swift connector	without cable									0			
		with cable 1.5 m									L			
		with cable 2.0 m									N			
		with cable 3.0 m									Q			
		with cable 5.0 m									R			
	Pressure connection ¹⁾	Inside thread	G ¼ with O-Ring seal FPM									1	1	1
¼ -18 NPT											3	1	1	
R ¼ acc. to EN 10226											7	1	1	
Outside thread		G ½ sealed at front									M	1	1	
		G ½ sealed at back DIN 3852-E with Profile seal ring in FPM									H	1	1	
		G ¼ sealed at front									J	1	1	
		G ¼ sealed at back DIN 3852-E with Profile seal ring in FPM									4	1	1	
		G ½ sealed at front									9	1	1	
		G ½ sealed at back DIN 3852-E with Profile seal ring in FPM									8	1	1	
		G ½ sealed at back DIN 3852-E with Profile seal ring in FPM with hole Ø 11mm									S	1	1	
Pressure range variation (optional)	Indicate W and state range on order (e. g. W0... + 0.5bar/OUT0.5...4.5V)												W	

¹⁾ Other pressure ranges on request

²⁾ Delivery without female connector

Order code selection in MPa			1	2	3	4	5	6	7	8	9	10	11				
			525.	X	X	X	X	X	X	X	X	X	X				
Pressure range ¹⁾	0 ... 0.005 MPa		9	G	1												
	0 ... 0.010 MPa		9	G	2												
	0 ... 0.016 MPa		9	G	3												
	0 ... 0.020 MPa		9	G	4												
	0 ... 0.025 MPa		9	G	5												
	0 ... 0.030 MPa		9	G	6												
	0 ... 0.040 MPa		9	G	7												
	0 ... 0.060 MPa		9	G	8												
Sealing material	FPM	Fluoro elastomer				0	0										
	EPDM	Ethylene propylene				1	0										
	NBR	Butadiene Acrylonitrile				2	0										
Output / power supply	0 ... 5 V	7 ... 33 VDC						1									
	0 ... 10 V	12 ... 33 VDC						2									
	4 ... 20 mA	10 ... 30 VDC						3									
		10 ... 30 VDC						4									
	ration. 10 ... 90%	5VDC ±10%						7									
Electrical connection	Connector	DIN EN 175301-803-A ²⁾									1						
		DIN EN 175301-803-C (Industrial standard 9.4 mm) ²⁾										2					
		M12x1 ²⁾	2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3										3				
	Swift connector	M12x1 ²⁾	3w: IN=1 / OUT=3 / GND=4							1,2							
		without cable (PG9)											0				
		with cable 1.5 m												L			
		with cable 2.0 m													N		
		with cable 3.0 m													Q		
		with cable 5.0 m													R		
		Pressure connection ¹⁾	Inside thread	G 1/4 with O-Ring seal FPM										1	1	1	
1/4 -18 NPT													3	1	1		
R 1/4 acc. to EN 10226														7	1	1	
G 1/8 sealed at front														M	1	1	
G 1/8 sealed at back DIN 3852-E with Profile seal ring in FPM															H	1	1
Outside thread	G 1/4 sealed at front													J	1	1	
	G 1/4 sealed at back DIN 3852-E with Profile seal ring in FPM														4	1	1
	G 1/2 sealed at front														9	1	1
	G 1/2 sealed at back DIN 3852-E with Profile seal ring in FPM														8	1	1
	G 1/2 sealed at back DIN 3852-E with Profile seal ring in FPM with hole Ø 11mm															S	1
Pressure range variation (optional)	Indicate W and state range on order (e.p.: W0... + 0.5bar/OUT0.5...4.5V)																W

Dimensions in mm / Electrical connections

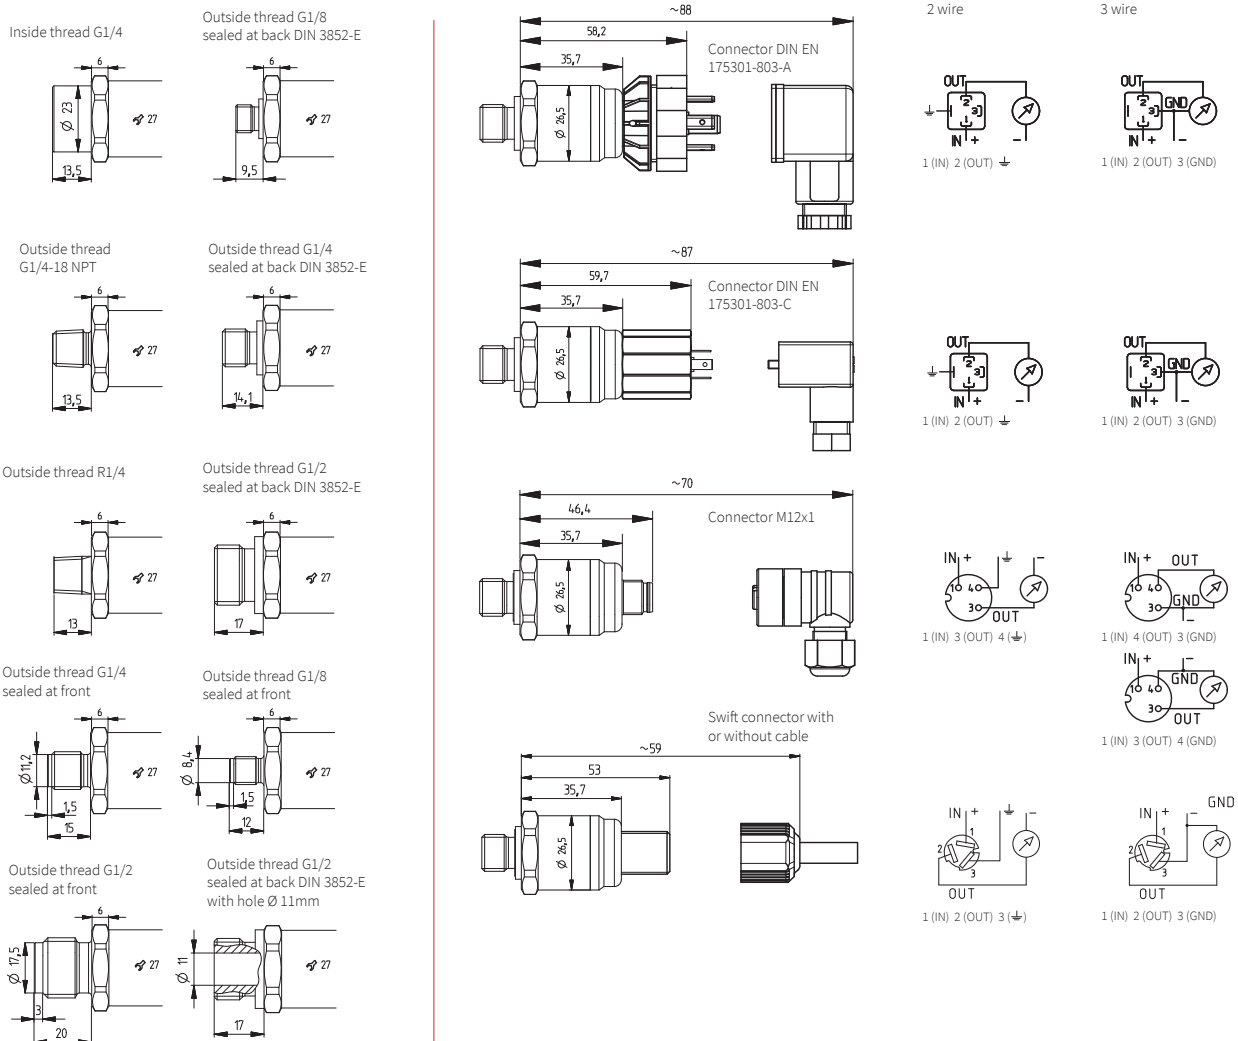

¹⁾ Other pressure ranges on request ²⁾ Delivery without female connector



株式会社 **クローネ**

■カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。
■製品のデザイン、仕様等などは、予告なく変更する場合があります。

本 社：〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698
大阪支店：〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360
e-mail: sales-tokyo@krone.co.jp URL: <https://www.krone.co.jp>

www.hubacontrol.com

