

AVAILABLE
with Signature
Calibration
SEE PG. IN-5

High Range Wet/Wet Differential Pressure Transducers

Models Z and A-5



AMPLIFIED OUTPUT AVAILABLE

2000 to 10,000 psid

ACCURACY TO 0.25%

The Z and A-5 High Range Wet/Wet transducers are engineered to measure differential pressures as great as 10k psid and achieve accuracies of 0.25%-0.5% full scale. Each series is bi-directional and accepts fluid in both ports. 17-4 PH stainless steel ensures durability of these bonded foil strain gage units under harsh industrial conditions. Typical applications include flow measurement, depth sensing, pressure equalization, and hydraulic testing.

PERFORMANCE

	Model Z Order Code: BD141	Model A-5 Order Code: BD142
Pressure Ranges.....	2000 to 10,000 psid	2000 to 10,000 psid
Accuracy.....	+/-0.25% F.S.	+/-0.5% F.S.
Non-Linearity (max).....	+/-0.15% F.S.	+/-0.25% F.S.
Hysteresis (max).....	+/-0.10% F.S.	+/-0.13% F.S.
Non-Repeatability (max).....	+/-0.05% F.S.	+/-0.07% F.S.
Output (standard).....	2mV/V	2mV/V
Resolution.....	Infinite	Infinite

ENVIRONMENTAL

Temperature, Operating.....	-65° F to 250° F	-65° F to 250° F
Temperature, Compensated.....	60° F to 160° F	60° F to 160° F
Temperature Effect		
-Zero (max).....	0.5% F.S./100° F	0.75% F.S./100° F
-Span (max).....	0.5% Rdg./100° F	1% Rdg./100° F

ELECTRICAL

Strain Gage Type.....	Bonded foil	Bonded foil
Excitation (calibration).....	10VDC	10VDC
Bridge Resistance.....	350 ohm	350 ohm
Wiring Code (std).....	#2 (See Pg. AP-8)	#2 (See Pg. AP-8)
Electrical Termination (std)	PTIH-10-6P or equiv. (Hermetic stainless)	PTIH-10-6P or equiv.
Mating Connector (not incl.).....	PT06A-10-6S or equiv.	PT06A-10-6S or equiv.


MECHANICAL

Media.....	Gas, Liquid	Gas, Liquid
Maximum Line Pressure.....	2000 psi	2000 psi
Maximum Overload - safe..... (either side)		
2000 to 3000 psid.....	100% over capacity	100% over capacity
5000 to 10,000 psid.....	50% over capacity	50% over capacity
Pressure Port.....	1/4-18NPT female	1/4-18NPT female
Wetted Parts Material.....	17-4 PH Stainless	17-4 PH Stainless
Case Material.....	17-4 PH Stainless	17-4 PH Stainless

NOTES *Unless otherwise specified on order, amplified units with **4-20mA output will provide 4mA at 0 psid and 20mA at positive full scale** and the unit will not operate in the negative direction. An available alternative is to specify 4mA at negative full scale and 20mA at positive full scale. Intrinsically safe amp (option 2n or 2N, see page AP-6) adds 2" to amplifier housing.

Dimensions

Models Z (Order Code BD141)
Models A-5 (Order Code BD142)
Available Ranges
2,000; 3,000; 5,000; 7,500; 10,000 psid

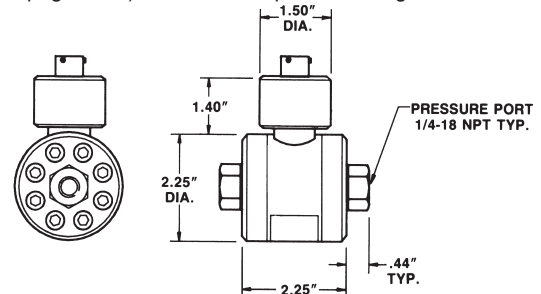

Options (See Appendix)

Temperature compensated 1b, 1c, 1d, 1e, 1f; Internal amps 2b, 2c, 2n or 2N intrinsically safe amp (see page AP-6), 2j, Amp enhancements 3b, 3d; Electrical termination 6e, 6f, 6g, 6h, Int. shunt cal 8a, 25b, Signature calibration 53e.

Premium Options: 2q, 3a, 5c, 6b, 6c, 6i, 6j

Accessories: Mating connectors and connector/cable assemblies, Pressure port adapters

1-888-282-9891

Honeywell
Sensotec Sensors

www.honeywell.com/sensing