


**PRVM12TP**

Rev. 0 - 24/05/2021

## EXTENSION CABLE M12 WITH 4-WIRE TPE INSULATED CABLE

Extension cables with 4-pin M12 female connector suitable for TRM and TRC probes

- OVERMOULDED connection with 4-wire TPE insulated cable
- Straight or elbow type connector versions with IP67 protection degree

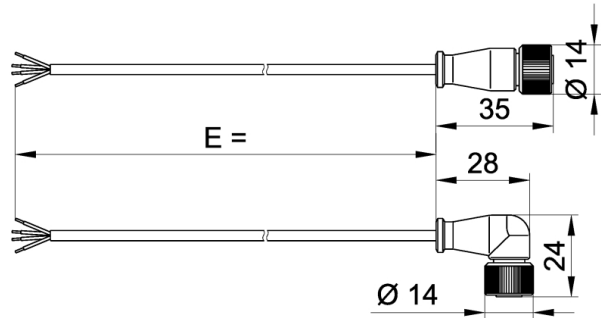

### TECHNICAL SPECIFICATION

Type of connector	female 4-pin connector with M12x1 metal screw lock (in accordance with IEC 61076-2-101 STANDARDS)
Connection body material	TPE (MOULDED)
Maximum connector temperature	90°C
International protection marking (*) (*) According to IEC 60529	IP67
Female connector	overmoulded straight M12 female connector overmoulded right-angle M12 female connector
Extension cable	TPE a 4 wire
Cable conductors	copper tinned
Number of cable conductors	4
Conductor dimension	AWG 24
Conductor feature	strand (7 wire)
Primary insulation	PP (polypropylene)
Outside diameter of single conductor (*) (*) primary insulation	about Ø 1.05 mm
Primary insulation colour	2 white, 2 red
Secondary insulation	TPE (thermoplastic rubber)
Secondary insulation colour	black
Cable size or external shape	about Ø 4 mm
Cable working temperature	-40 ÷ 105°C (6h @150°C)
Cable extension E	1500 mm 3 m 5 m
Dimensional notes	Extensions other than those listed can be produced for minimum quantities to be agreed (after our feasibility study)

PRV #		
Lunghezza cavo (mm)	Tipo di cavo	Tipo di connettore
1500	AH	C
3000	AL	D
5000		

□



株式会社 **クローネ**

■ カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。  
■ 製品のデザイン、仕様等などは、予告なく変更する場合があります。

本 社：〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698  
大阪支店：〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360  
e-mail: sales-tokyo@krone.co.jp URL: <https://www.krone.co.jp>