



Low Volume Rotating Vane Flowmeter



measuring
•
monitoring
•
analysing

DPM



- Measuring ranges:
0.015 - 0,3 ... 0.05 - 5 l/min water
- Accuracy:
 $\pm 1\%$ ($\pm 2,5\%$) of full scale
- p_{max} : 16 bar; t_{max} : 80 °C
- Connection: G 1/8, G 1/4 female
1/8" NPT, 1/4" NPT female
- Material: brass nickel-plated
or stainless steel
- Medium: infrared light
transmissive

S4




KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECHIA, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com

Application

The KOBOLD model DPM flowmeters are used for measuring and monitoring liquids. Due to its compact construction the measuring instrument is suitable for use with machines with minimum available space. The system can be used in a wide variety of applications because the output pulses can be analysed in many different ways.



Areas of Application:

- low viscosity liquids
- non-conductive liquids
- volume dosing with external electronics
- filter aid

Technical Details

Accuracy:	
DPM..000, F300:	± 2.5% of full scale
DPM...F390, DPM...L,	
DPM..C, DPM..Z:	± 1% of full scale
Linearity:	1% of full scale
Repeatability:	0.5%
Medium temperature:	-40 ... +80 °C
Ambient temperature:	-30 ... +60 °C
Max. operating pressure:	16 bar
Protection:	IP 65

Materials

Housing:	brass nickel-plated stainless steel 1.4404
Upper part:	brass nickel-plated stainless steel 1.4404
Union nut:	brass nickel-plated or stainless steel 1.4305
Orifice:	1.4404
Axle:	sapphire
Rotating vane:	polypropylene
Vane mount:	polysulfone
Gasket:	NBR (standard), FPM or EPDM (optional)

Operating Principles

The medium flows through a specially shaped flow housing and causes a vane to rotate. This rotary motion is sensed by optoelectronics in a non-contacting manner, and converted to an asymmetric frequency signal or an analogue signal. A frequency divider with symmetrical output is available as an option. The frequency is proportional to the flow velocity.

The vane is sapphire-supported: this ensures a high degree of linearity and long service life.

Electronics

● Frequency output (OEM without CE-Sign)

Power supply:	4.5 - 12 V _{DC}
Supply current:	typ. 7 mA
Signal amplitude high:	approx. power supply
Signal amplitude low:	≤ 0.2 V
Transmitter cut-off voltage:	3 V max.
Transmitter supply current:	8 - 12 mA
Output loss:	max. 2.5 mWatt
Electrical connection:	solder pins
Pulse output:	NPN, Open Collect., max. 10 mA

● Frequency output (option frequency divider)

Power supply:	24 V _{DC} ±20%
Supply current:	40 - 50 mA
Signal amplitude high:	approx. power supply
Signal amplitude low:	≤ 0.2 V
Output loss:	max. 2.5 mWatt
Electrical connection:	plug M12x1 (option: 2 m PVC cable)
Division ratio (option):	1...1/128 factory set
Pulse output:	PNP, open collector, max. 20 mA

● Analogue output (option plug-on display)

Power supply:	24 V _{DC} ±20%
Output:	0-20 mA or 4-20 mA, 3-wire technology
Max. load:	500 Ω
Electrical connection:	plug connector M12x1 or DIN 43 650
Option:	plug-on display (with plug connector DIN 43 650 only)

● Compact electronics

Display:	3-position LED
Analogue output:	(0)4...20 mA adjustable, max. 500 Ω
Switching outputs:	1 (2) semiconductor PNP or NPN, set at the factory
Contact operation:	programmable N/C/ N/O contact via 2 buttons
Setting:	
Power supply:	24 V _{DC} ±20%, approx. 100 mA, 3-wire technology
Electrical connection:	plug connector M12x1

● Pointer indication with analogue output

Housing:	aluminium (PA6 GF30)
Display:	moving coil instrument, 240° display
Power supply:	24 V _{DC} ±20%
Output:	(0)4...20 mA, set at the factory, 3-wire technology
Max. load:	250 Ω
Electrical connection:	plug connector M12x1

Order Details (Example: DPM-1107 G1 0000)

Meas. range [l/min] water	approx. frequency [Hz] at max. value	approx. pressure [bar] at max. value	Gasket model		Connection	Electronic analyser
			Material brass	Material st. steel		
15 - 300 ml/min	165	0.93	DPM-1103	DPM-1503	G1..= G 1/8 female G2..= G 1/4 female N1..= 1/8" NPT N2..= 1/4" NPT	<p>Frequency output</p> ..0000 = Frequency output, NPN, without cable (OEM), no CE ..F300 = Frequency output, plug M12x1, PNP ..F320 = Frequency divider 1:2, plug M12x1, PNP ..F340 = Frequency divider 1:4, plug M12x1, PNP ..F390 = Freq. divider 1.../128, plug M12x1, PNP ..F500 = Frequency output, PNP, 2m PVC cable ..F520 = Frequency divider 1:2, 2m PVC cable, PNP ..F540 = Frequency divider 1:4, 2m PVC cable, PNP ..F590 = Freq. divider 1.../128, 2m PVC cable, PNP <p>Analogue output</p> ..L303 = 0-20 mA output, M12x1 plug ..L343 = 4-20 mA output, M12x1 plug ..L403 = 0-20 mA output, plug DIN 43 650 ..L443 = 4-20 mA output, plug DIN 43 650 <p>Compact electronics*</p> ..C30R = LED display, 2x open collector, PNP, plug M12x1 ..C30M = LED display, 2x open collector, NPN, plug M12x1 ..C34P = LED display, 4-20 mA, 1x open collector, PNP, plug M12x1 ..C34N = LED display, 4-20 mA, 1x open collector NPN, plug M12x1 <p>Pointer indication*</p> ..Z300 = 240° pointer indication, 0-20 mA, plug M12x1 ..Z340 = 240° pointer indication, 4-20 mA, plug M12x1
50 - 700 ml/min	228	1.16	DPM-1107	DPM-1507		
0.05 - 1.0	217	0.53	DPM-1110	DPM-1510		
0.05 - 2.0	344	0.91	DPM-1120	DPM-1520		
0.05 - 3.0	372	0.61	DPM-1130	DPM-1530		
0.05 - 4.0	415	0.57	DPM-1140	DPM-1540		
0.05 - 5.0	439	0.57	DPM-1150	DPM-1550		

* Please specify flow direction in writing


Plug-on Display

for model DPM...L443... (with 4 -20 mA output and DIN plug connector)


Description	Order number
4-position LED, plug connector DIN 43 650, 3-wire, power supply through analogue output	AUF-3000

Electrical Connection


DPM..0000




DPM..L3 / DPM..Z / DPM..F



DPM..C




DPM..L4




Dimensions [mm]


DPM-...0000 (OEM)

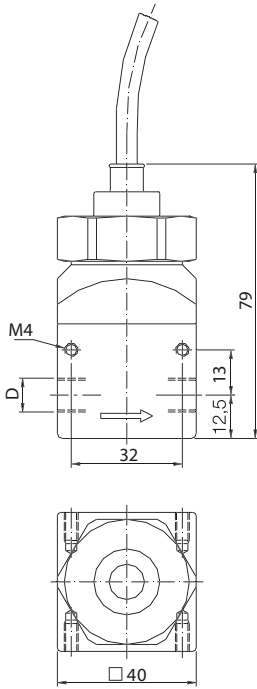


DPM-...F with frequency output
DPM-...L with analogue output

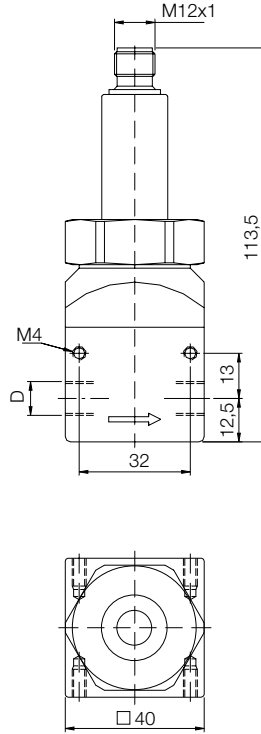

DPM-...C with compact electronics

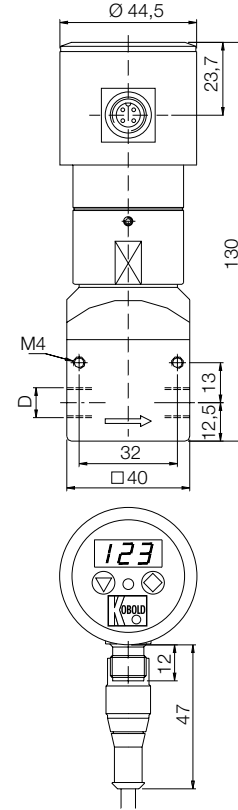

DPM-...L with analogue output and plug-on display

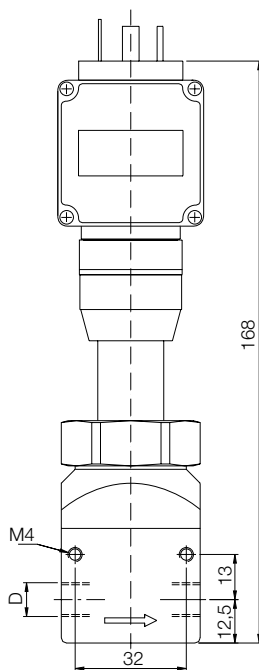

DPM-...Z with analogue output and pointer indication

