



High Precision Turbine Wheel Flowmeter

for liquids




measuring
•
monitoring
•
analysing

PEL



Model: PEL... LMX

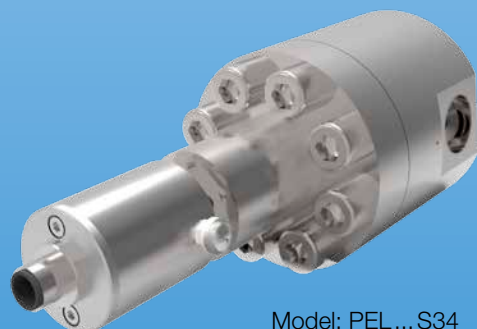

Model: PEL... S34

- Measuring ranges:
0.004-0.06 ... 0.1-28 l/min water
- Measuring accuracy:
±2% of reading
- p_{\max} : 345 bar; t_{\max} : 135 °C
- Viscosity range: low viscosity,
max. 10 mm²/s
- Connection: R $\frac{1}{4}$, R $\frac{1}{2}$
- Material: stainless steel,
aluminium
- Output: pulses

S4



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, EGYPT, FRANCE,
GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO,
NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SPAIN, SWITZERLAND,
THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com

Description

The sensor principle based on a Pelton water wheel is remarkable for its high reliability – proven over more than ten years of service. This flowmeter is to be found in applications in a variety of plants, where they are mainly used for measuring of negligible volumetric flow rates of media such as fuels, distilled water, or hot greases. The sensors satisfy almost all industrial requirements with temperature limits of 135 °C and nominal pressures up to 345 bar (higher pressures upon request). Only V4A Supra stainless steel (material no. 1.4571) is used for metallic parts. Swiss precision sapphire bearings ensure long service life and reliability.

Model PEL-L ... for low flow rates

- Linearity: $\pm 2\%$ of reading
- Repeatability: $< \pm 0.2\%$ at 90% of range
- Accuracy: $\pm 2\%$ of actual reading for 10-100% of range
 $\pm 0.5\%$ FSD for 0-10% of range
- Measuring range: 100:1 up to 280:1


Function Principle

The model PEL flowmeter works on the turbine wheel principle. The heart of this device is a Pelton turbine supported by sapphire bearings. The Pelton turbine is an impeller with ferrite inserts embedded in the blade tips. When this turbine is brought into rotary motion, the motion is recorded by a coil mounted nearby; the resulting electrical impulses are passed to a control unit for further processing.

Technical Details

Standard pulse output (Code F)

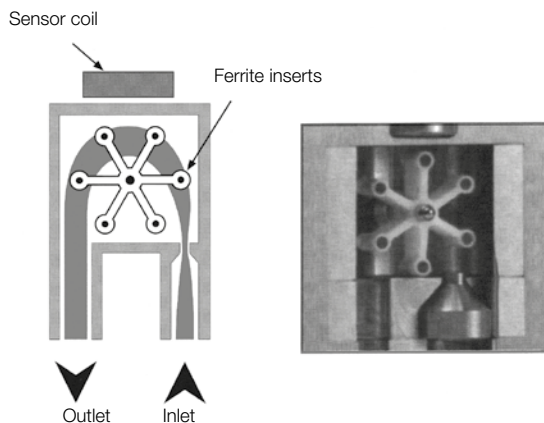

- Power supply: 8-28 V_{DC}
- Signal: NPN



Model KOBOLD PEL-L flowmeters measure the entire volumetric flow that passes through the instrument. A nozzle guides the flow to the impeller. The resulting turbine rotation is proportional to the flow rate.

A small sensing coil signals the approach of the ferrite inserts contained in the impeller. An output signal with constant current is then produced by the electronics.

Other critical media such as toluene and vinyl chloride can be measured in hazardous environments. Sensors made of less expensive materials are used for less sophisticated conditions.

Model	Version	
	...LMX...	...S34...
PEL-L00L...		
PEL-L000...		
PEL-L001...		
PEL-L005...		
PEL-L024...		
PEL-L045...		
PEL-L090...		
PEL-L220...		
Process connection	R ½ male thread	R ¼ female thread
Housing	VA	VA
Electronic housing	VA/Alu	VA/Alu
Turbine ring	VA	VA
Rotating vane	PFA	PFA
Rotating vane bearings	Sapphire	Sapphire
Rotating vane axle	VA/Sapphire	VA/Sapphire
O-ring	PTFE	FPM
p _{max}	100 bar (L000 & L001:30 bar)	345 bar
t _{max}	100 °C	135 °C

Flow rate range	Pressure drop
0.004 ... 0.060 l/min	0.18 bar @ 0.03 l/min; 0.7 bar @ 0.06 l/min
0.006 ... 0.100 l/min	0.18 bar @ 0.05 l/min; 0.7 bar @ 0.10 l/min
0.01 ... 0.25 l/min	0.33 bar @ 0.125 l/min; 1.3 bar @ 0.25 l/min
0.02 ... 1.3 l/min	0.18 bar @ 0.65 l/min; 0.74 bar @ 1.3 l/min
0.03 ... 4.3 l/min	0.3 bar @ 2 l/min; 1.2 bar @ 4.3 l/min
0.04 ... 6.3 l/min	0.23 bar @ 3 l/min; 1.3 bar @ 6.3 l/min
0.08 ... 15 l/min	0.25 bar @ 9 l/min; 0.7 bar @ 15 l/min
0.1 ... 28 l/min	0.24 bar @ 10 l/min; 1.8 bar @ 28 l/min


Order Details (example: PEL-L000 GN1 F)

Measuring range* [l/min]	Model	Version/material	Evaluating electronics
0.004-0.06	PEL-L00L	...LMX...S34...	...F = standard pulse output
0.006-0.1	PEL-L000		
0.01-0.25	PEL-L001		
0.02-1.3	PEL-L005		
0.03-4.3	PEL-L024		
0.04-6.3	PEL-L045		
0.08-15	PEL-L090		
0.1-28	PEL-L220		




Dimensions [mm]

PEL-L...S34

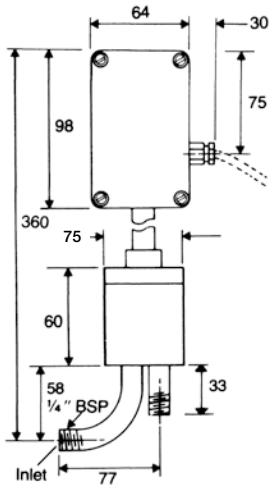

PEL-L	...00L up to ...090	...220
A	14 mm	17 mm
B	8 mm	11 mm

PEL-L...LMX

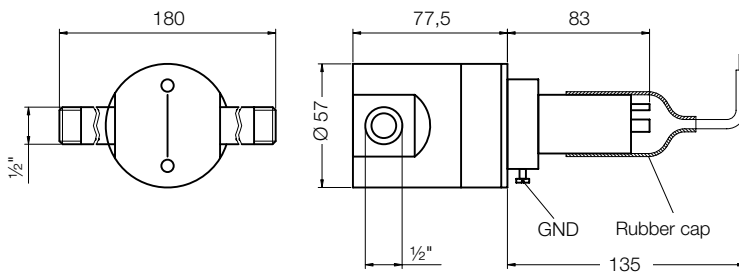

株式会社 クローネ

■ カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。
 ■ 製品のデザイン、仕様等などは、予告なく変更する場合があります。

本 社：〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698
 大阪支店：〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360
 e-mail: sales-tokyo@krone.co.jp URL: https://www.krone.co.jp