



# **311 CABLE ASSEMBLY**

IEPE plug and play accelerometer cable assembly featuring M3 Coaxial connector and BNC connector. Standard length is 120 inches. Mates with accelerometer model 7101A, 7102A.


## **FEATURES**

- M3 Coaxial Connector to BNC Connector
- SPC Braided Shield
- #33 AWG Conductors
- Extruded PFA Jacket
- -55°C to +200°C Temp Range


# **APPLICATIONS**

- Laboratory Testing
- Modal Applications
- General Use
- Vibration Monitoring
- Shock Monitoring

### DIMENSIONS

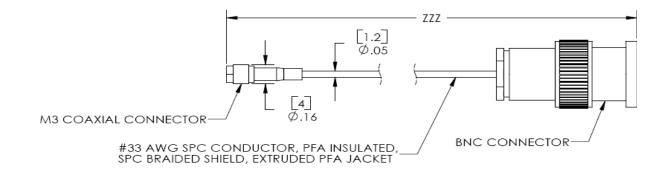

# **ORDERING INFORMATION**

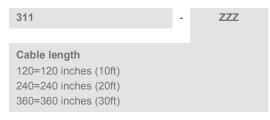

Example; 311-120 Model 311 cable, 120inch cable length (standard length typically in stock)



本 社:〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL:(03)3695-5431/FAX:(03)3695-5698 大阪支店:〒530-0054 大阪市北区南森町2-2-9(南泰町八千代ビル7F) TEL:(06)6361-4831/FAX:(06)6361-9360 e-mail: sales-tokyo@krone.co.jp URL: https://www.krone.co.jp

#### te.com/sensorsolutions

TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.