



82 Compensated

SPECIFICATIONS

- ◆ **316L SS Pressure Sensor**
- ◆ **19mm Diameter Package**
- ◆ **0 - 100mV Output**
- ◆ **Absolute and Gage**
- ◆ **Temperature Compensated**

The 82 compensated is a 19 mm small profile, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. The 82 compensated can be configured for o-ring mounting or threaded process fittings and is designed for OEM applications where compatibility with corrosive media is required.

The sensing package utilizes silicone oil to transfer pressure from the 316L stainless steel diaphragm to the sensing element. A ceramic substrate is attached to the package that contains laser-trimmed resistors for temperature compensation and offset correction. An additional laser-trimmed resistor is included which can be used to adjust an external differential amplifier and provide span interchangeability to within $\pm 1\%$.

Please refer to the 82 uncompensated and constant voltage datasheets for more information on different features of the 82.

FEATURES

- ◆ O-Ring Mount/Threaded Process Fittings
- ◆ -40°C to +125°C Operating Temperature Range
- ◆ ±0.2% Pressure Non Linearity
- ◆ 1.0% Interchangeable Span (provided by gain set resistor)
- ◆ Solid State Reliability

APPLICATIONS

- ◆ Medical Instruments
- ◆ Process Control
- ◆ Fresh & Waste Water Measurements
- ◆ Partial Vacuum Gas Measurement
- ◆ Pressure Transmitters
- ◆ Tank Level Systems (RV & Industrial)

STANDARD RANGES

| Range | psia | psig |
|----------|------|------|
| 0 to 1 | | ◆ |
| 0 to 5 | ◆ | ◆ |
| 0 to 15 | ◆ | ◆ |
| 0 to 30 | ◆ | ◆ |
| 0 to 50 | ◆ | ◆ |
| 0 to 100 | ◆ | ◆ |
| 0 to 300 | ◆ | ◆ |
| 0 to 500 | ◆ | ◆ |

PERFORMANCE SPECIFICATIONS

Supply Current: 1.5mA

Ambient Temperature: 25°C (unless otherwise specified)



| PARAMETERS | 001PSI | | | 005PSI | | | ≥015PSI | | | UNITS | NOTES |
|-------------------------------|---|-------|------|--------|-------|------|---------|-------|-------|--------|-------|
| | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | | |
| Span | 50 | 100 | 150 | 50 | 100 | 150 | 75 | 100 | 150 | mV | 1 |
| Zero Pressure Output | -2 | 0 | 2 | -2 | 0 | 2 | -1 | 0 | 1 | mV | |
| Pressure Non Linearity | -0.3 | | 0.3 | -0.2 | | +0.2 | -0.1 | | 0.1 | %Span | 2 |
| Pressure Hysteresis | -0.10 | ±0.02 | 0.10 | -0.10 | ±0.02 | 0.10 | -0.05 | ±0.02 | 0.05 | %Span | |
| Repeatability | | ±0.02 | | | ±0.02 | | | ±0.02 | | %Span | |
| Input Resistance | 2.5 | 5.0 | 6.5 | 2.5 | 5.0 | 6.5 | 3.8 | | 5.8 | KΩ | |
| Output Resistance | 4.0 | | 7.0 | 4.0 | | 7.0 | 4.0 | | 6.0 | KΩ | |
| Thermal Hysteresis – Span | -0.25 | ±0.05 | 0.25 | -0.25 | ±0.05 | 0.25 | -0.25 | ±0.05 | +0.25 | %Span | 3 |
| Thermal Hysteresis – Offset | -0.25 | ±0.05 | 0.25 | -0.25 | ±0.05 | 0.25 | -0.25 | ±0.05 | +0.25 | %Span | 3 |
| Temperature Error – Span | -1.0 | | 1.0 | -1.0 | | 1.0 | -0.75 | | 0.75 | %Span | 3 |
| Temperature Error – Offset | -1.0 | | 1.0 | -1.0 | | 1.0 | -0.5 | | 0.5 | %Span | 3, 9 |
| Long Term Stability – Span | | ±0.10 | | | ±0.10 | | | ±0.10 | | %Span | 4 |
| Long Term Stability – Offset | | ±0.25 | | | ±0.25 | | | ±0.10 | | %Span | 4 |
| Supply Current | 0.5 | 1.5 | 2.0 | 0.5 | 1.5 | 2.0 | 0.5 | 1.5 | 2.0 | mA | |
| Insulation Resistance (50Vdc) | 50 | | | 50 | | | 50 | | | MΩ | 5 |
| Output Noise (10Hz to 1KHz) | | 1 | | | 1 | | | 1 | | uV p-p | |
| Response Time (10% to 90%) | | 0.1 | | | 0.1 | | | 0.1 | | ms | |
| Pressure Overload | | | 10x | | | 3x | | | 3x | Rated | 6 |
| Pressure Burst | | | 12x | | | 4x | | | 4x | Rated | |
| Operating Temperature | -20 | | +70 | -20 | | +70 | -40 | | +125 | °C | |
| Compensated Temperature | 0 | | +50 | 0 | | +70 | -20 | | +85 | °C | |
| Storage Temperature | -50 | | +125 | -50 | | +125 | -50 | | +125 | °C | 7 |
| Media – Pressure Port | Liquids and Gases compatible with 316L Stainless Steel and Buna-N | | | | | | | | | | 8 |
| Media – Reference Port | Compatible with Silicon, Pyrex, Gold, Fluorosilicone RTV and 316L Stainless Steel | | | | | | | | | | |

Notes

1. Ratiometric to supply current.
2. Best fit straight line.
3. Maximum temperature error within the compensated temperature range with respect to 25°C.
4. Long term stability over a one year period with constant current and temperature.
5. Minimum resistance between case and pins.
6. 10 psi maximum for 1 psi devices.
7. Maximum temperature range for product with standard cable and connector is -20°C to +105°C.
8. Gage units not recommended for high vacuum applications. For high vacuum applications consult factory.
9. Temperature Error – Offset for 15psi is -0.75 to 0.75 and >15psi is -0.5 to 0.5.


DIMENSIONS

Dimensions are in inches [mm]

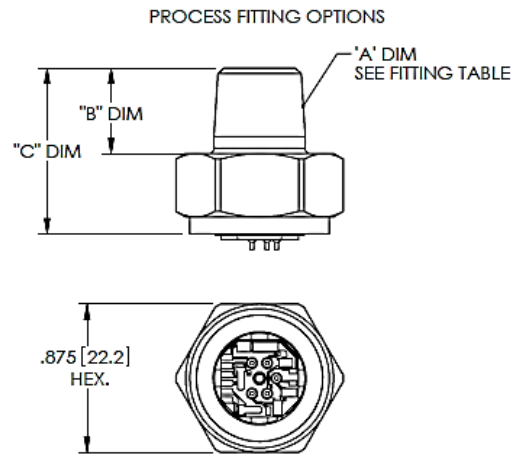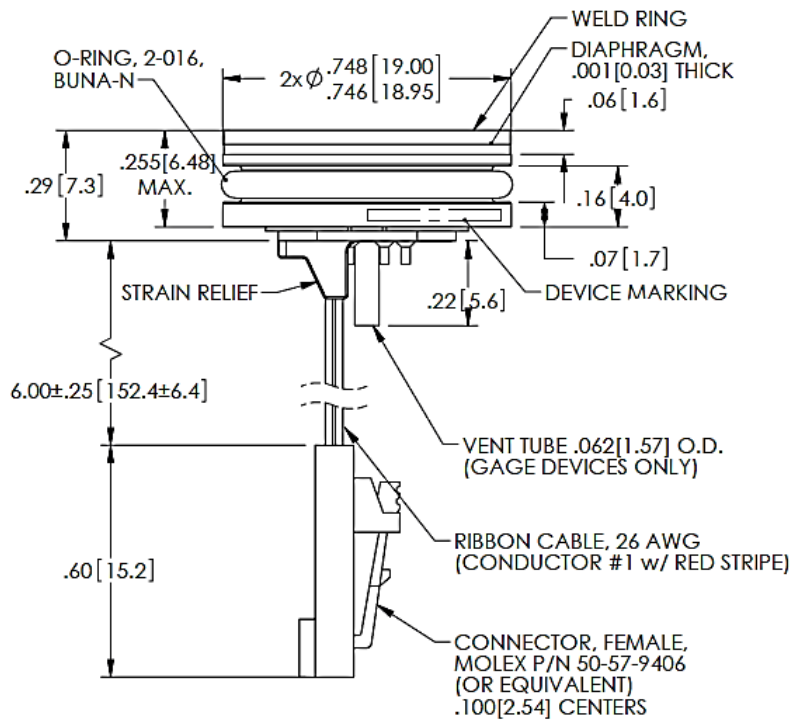


| FITTING TABLE | | | | |
|---------------|-----------|-------------|------------|------------|
| FITTING TYPE | MEMS P/N | 'A' DIM | 'B' DIM | 'C' DIM |
| 1 | IC-7152 | 1/4-18 NPT | .50 [12.7] | .98 [24.9] |
| 2 | IC-D00510 | 1/8-27 NPT | .47 [11.9] | .95 [24.1] |
| 3 | IC-D00511 | 7/16-20 UNF | .33 [8.4] | .80 [20.3] |
| 9 | IC-D00512 | 1/4-19 BSP | .45 [11.4] | .93 [23.3] |


NOTE: FITTING TYPE '1' ASSEMBLY SHOWN
ALL DIMS ARE FOR REFERENCE.

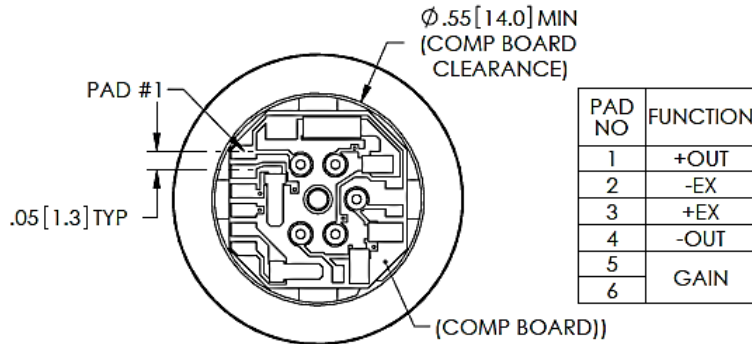


VIEW SHOWN W/O CABLE AND CONNECTOR FOR CLARITY

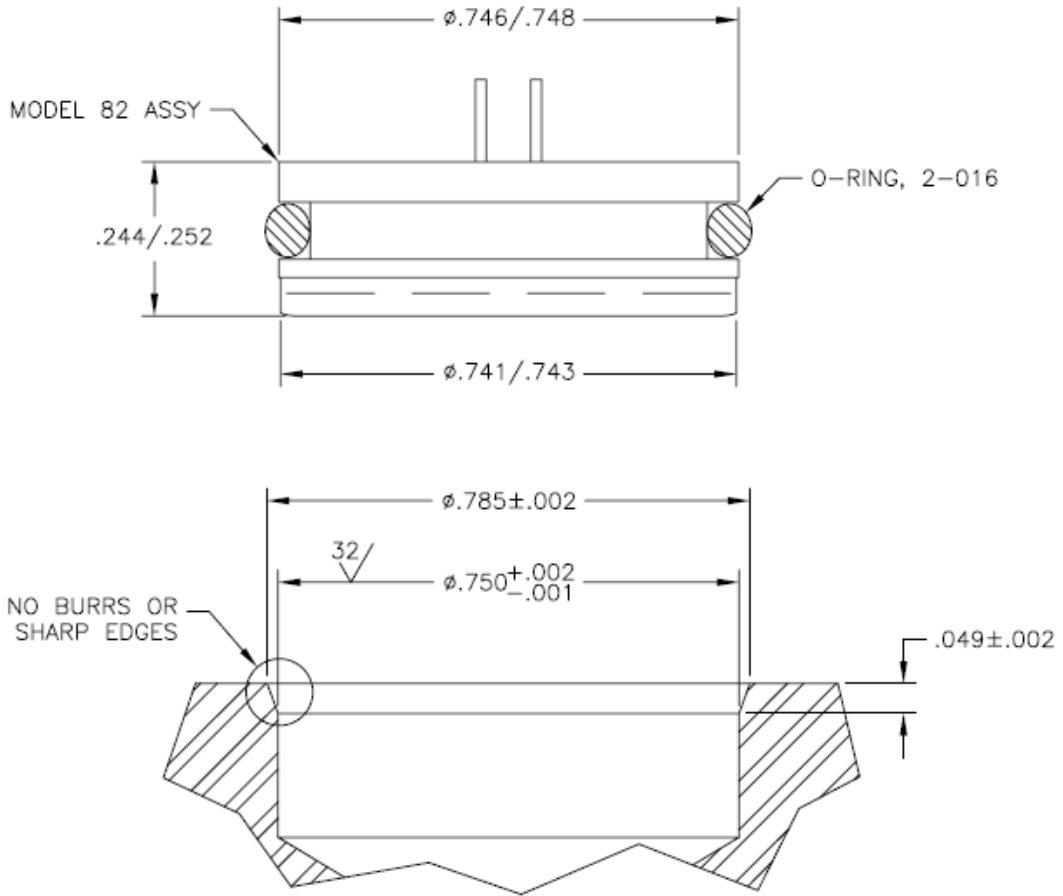

CONNECTIONS

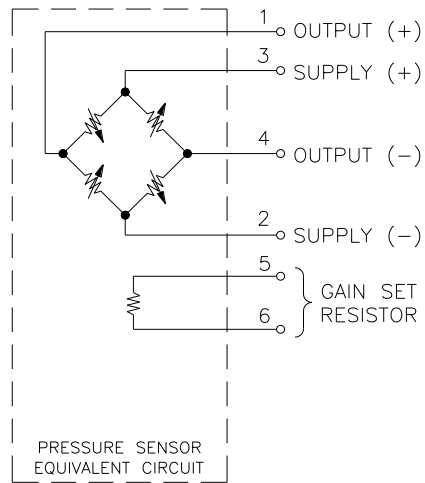

APPLICATION SCHEMATIC

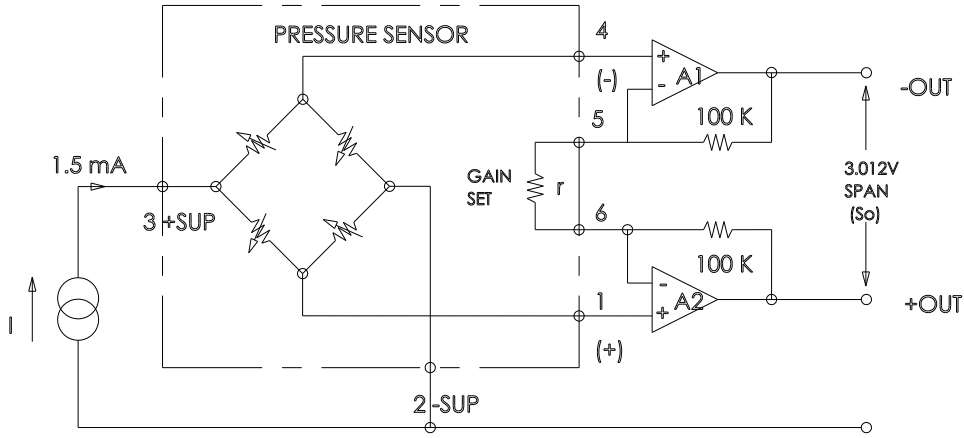

ORDERING INFORMATION

82 - 030 A - 3 B I

| Pressure Range [psi] | |
|----------------------|-------------|
| 001 | (Gage Only) |
| 005 | |
| 015 | |
| 030 | |
| 050 | |
| 100 | |
| 300 | |
| 500 | |

| Pressure Type | |
|---------------|----------|
| G | Gage |
| A | Absolute |

| Vent | |
|---------|---------|
| T | Tube |
| [Blank] | No Tube |

| Electrical | |
|------------|--------------------|
| P | Solder Pads |
| R | Ribbon cable |
| C | Cable w/ Connector |

| Fitting Type | |
|--------------|----------------------|
| [Blank] | No Fitting, Weldable |
| 3 | 7/16-20 UNF |
| 1 | 1/4-18 NPT |
| 2 | 1/8-27 NPT |
| 9 | 1/4-19 BSP |

Refer to Fitting Table for more information



株式会社 クローネ

■ カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。
 ■ 製品のデザイン、仕様等などは、予告なく変更する場合があります。

本 社：〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698
 大阪支店：〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360
 e-mail: sales-tokyo@krone.co.jp URL: https://www.krone.co.jp

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.