



M210 DISPLAY

SPECIFICATIONS

- Signal Conditioning
- Digital display meter
- Analogue output
- Casing mounted ABS in option

Features

- Analog Output: $\pm 10V$
- Red LED Display: 2,000 count
- High Bandwidth on analogue output (1 000 Hz)
- Low Noise Level

Applications

- Instrumentation Laboratory
- Test stand
- Process monitoring
- Rack Mounts

The **M210** electronic is an all-in-one signal conditioning and display meter that adapts to most strain gauge sensors. The **M210** device powers the sensor, amplifies the signals received from the sensor, and displays the value in real time.

The analog output is compatible with control systems and data acquisition cards. A power supply filter helps protect against incorrect voltage supply. The **M210** features high bandwidth and low noise level.

The large high visibility $\pm 2,000$ count LED display allows quick reading of the measurements.

Optionally, the **M210** offers many options including RTC switches and can be housed in an **ABS** case.

PERFORMANCE SPECIFICATIONS

All values are typical at temperature 23°C

General Characteristics

Dimensions (H x L x W)	48 x 96 x 155 mm [1.9 x 3.8 x 6.1 in]
Panel Cut-out	92 x 45 mm [3.6 x 1.8 in]
Operating Temperature	0° C to 50° C [32 to 122° F]
Storage Temperature	-40° C to 85° C [-40 to 185° F]
Relative Humidity	<95% at 40° C [104° F]
Rear panel connectors	
Weight	600g [1.3lb]

Electrical Characteristics

Standard Operating Power Voltage	115/230 Vac \pm 10%, 50 to 60 Hz
Power Supply Filter with Overvoltage Protection	
Optional Operating Power Voltage	12, 24, Vdc
Consumption	6VA
Sensor Excitation	10Vdc, 50mA maximum (\pm 5V) (12Vdc with option CD)
Sensor Sensitivity	10 to 1000mV F.S.

Amplification

Span	10 to 1000
Analog Output	10Vdc \pm 0.05% Full Scale (FS)
Analogue output accuracy	\pm 0.01% FS
Bandwidth at -3dB	1kHz
Noise Level	<10mV peak to peak


Display (1)

Type	Red LED Display \pm 2000 count display, 14mm
Display accuracy	0.2% F.S.
Conversion Rate	2.5 readings/second

Notes

1. The display works as an analogue output copy. If a calibration test is needed, it should be done thru the analogue output which is more accurate, and not with a display check only.

DIMENSIONS & WIRING SCHEMATIC

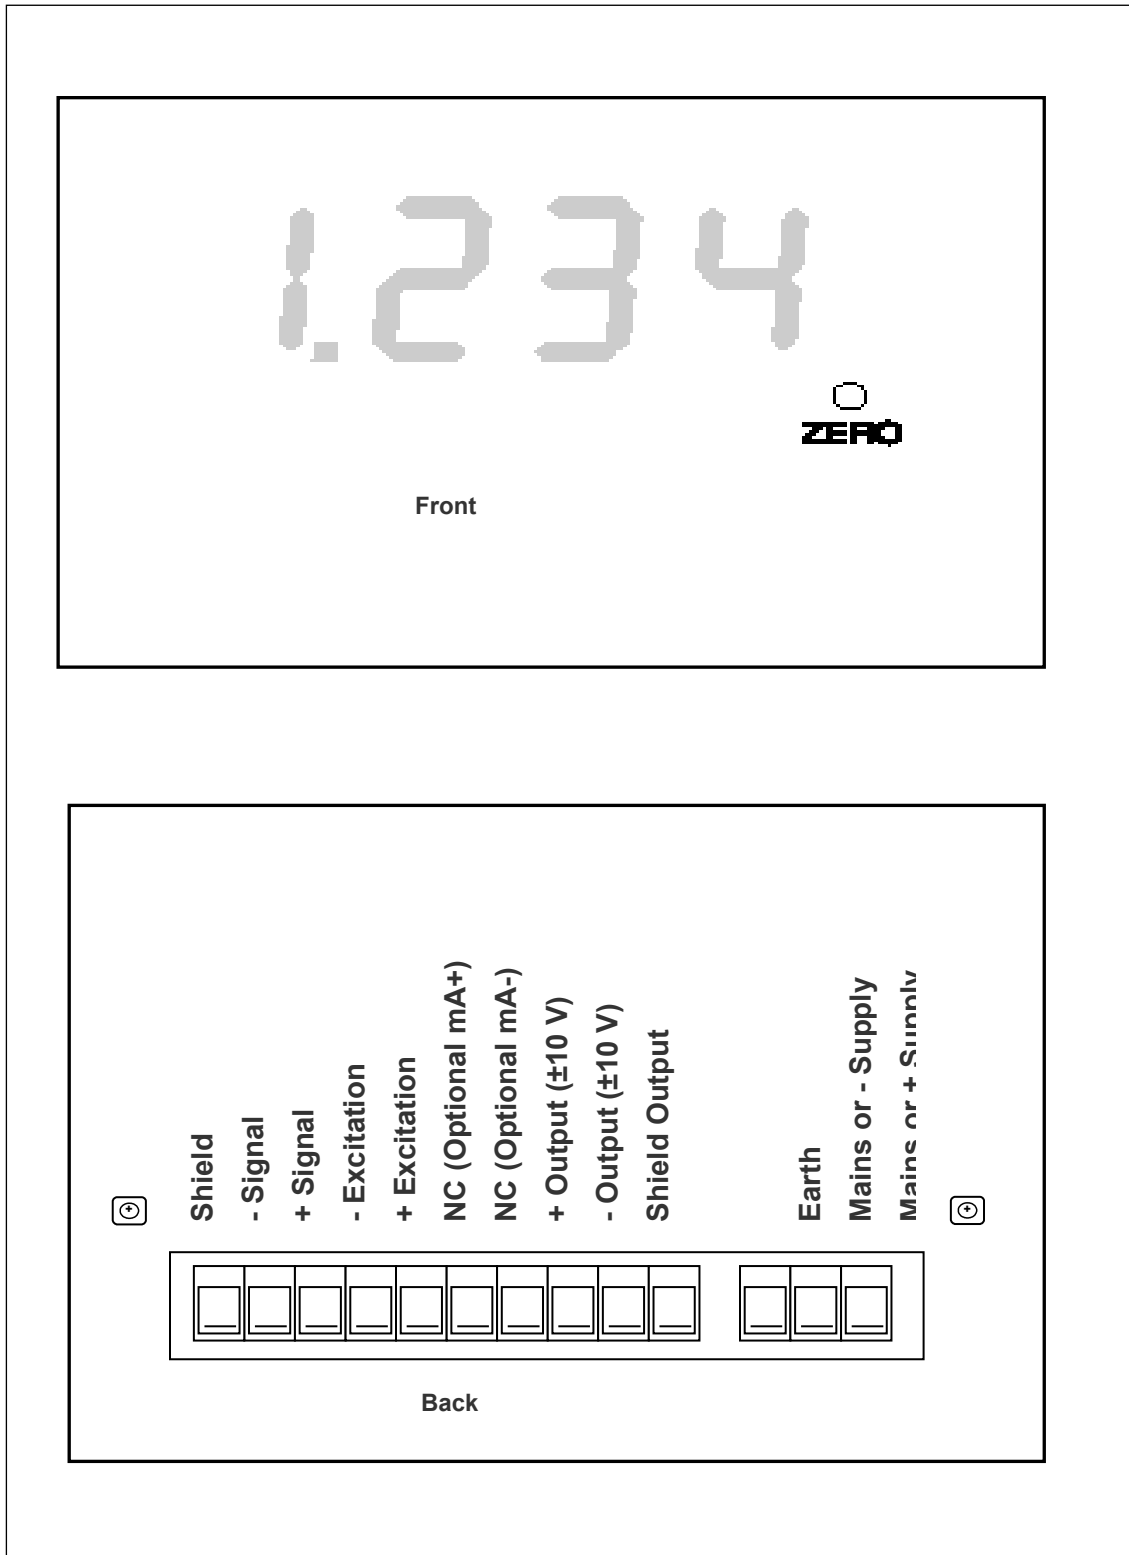


OPTIONS

12	: Excitation 12 Vdc
24	: Excitation 24 Vdc
4-20	: Analog Output Current 4 to 20mA
AL2	: Two adjustable threshold levels by internal relay
ABS	: House in ABS Case

Type of sensor

Wheatstone bridge sensors	
D	: Position sensor LVDT
CD	: Torquemeter type CD1140; CD9510
G	: Pressure sensor
N	: Potentiometric position sensor

ORDERING INFORMATION

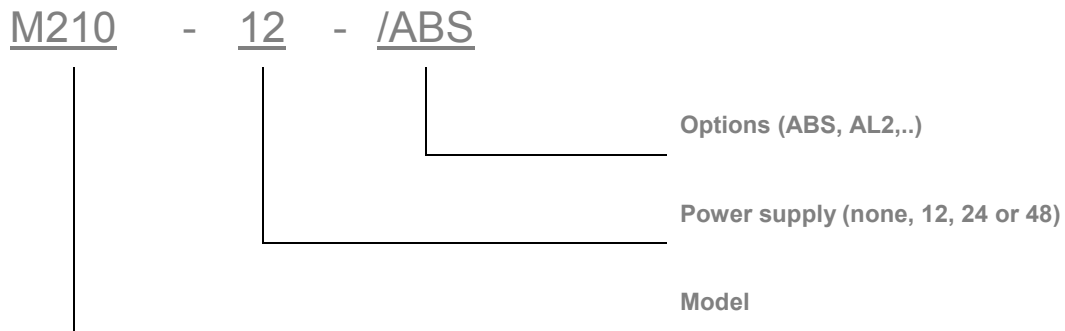

株式会社 **クローネ**

■ カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。
■ 製品のデザイン、仕様等などは、予告なく変更する場合があります。

本 社 : 〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698
大阪支店 : 〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360
e-mail: sales-tokyo@krone.co.jp URL: <https://www.krone.co.jp>

te.com/sensorsolutions

Measurement Specialties, MEAS, American Sensor Technologies, AST, TE Connectivity, TE, and the TE Connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.