

Digital pressure gauge // D-Ex // L-Ex

-1...1000 bar



D-Ex



L-Ex



Highlights – D-Ex

- For use in potentially explosive atmospheres
- Suitable for aggressive media
- Robust and compact design with edge protection
- Certificate (optional)

Highlights – L-Ex

- Like D-Ex
- Additional PC interface for direct data transfer
- Higher accuracy
- Certificate (optional)

Technical datasheet


SIKA Dr. Siebert & Kühn GmbH & Co. KG



Technical data

Type	D-Ex	L-Ex
Pressure ranges	Between -1...700 bar	Between -1...1000 bar
Accuracy (full scale)	0.1 %	0.05 %
Adjustment options		
Tare / Zero	✓	✓
Selectable units		
Pressure	Bar, mbar, hPa, kPa, MPa, PSI, kp/cm ²	Bar, mbar, hPa, kPa, MPa, PSI, mmHg, inHg, cmH ₂ O, mH ₂ O, inH ₂ O, ftH ₂ O, Kp/cm ²
Features		
Measuring inputs	1 x direct	1 x direct
PC connection		RS 485
Display		
Anzeige	Multi-functional LCD, 4 digit	Multi-functional LCD, 5 digit
Min / Max value	✓	✓
Measuring rate		
Standard	500 ms	500 ms
Process connection		
Thread	G $\frac{1}{4}$ / H16 UNF	G $\frac{1}{4}$
Material	Stainless steel 1.0718 zinc-plated Stainless steel 1.4435	Stainless steel 1.4435
Medium temperature	0...50 °C	0...50 °C
For aggressive media	✓	✓


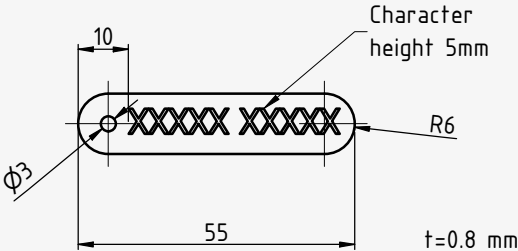
Technical data

General data		
Type	D-Ex	L-Ex
Housing		
Degree of protection	IP65	IP65 (Front) / IP54
Dimension	Ø 70 mm, T=30 mm H=100 mm	Ø 80 mm, T=40 mm H=120 mm
Material	ABS plastic	ABS plastic
Operating temperature	0...50 °C	0...50 °C
Weight	130 g	210 g
Power supply		
Auto-off function	✓	✓
Battery type	1x 3 VCR	1x 3 VCR
Battery operation	1000 h	2000 h
Approvals		
	Ex II 1G EEx ia II C T5/T6	Ex II 2G Ex ia II C T6

Article numbers

Order code			
Type	Accuracy (full scale)		
D-Ex	0.1 %		EME8REF-D-EX
L-Ex	0.05 %		EME8REF-L-EX
Pressure range		Resolution	
D-Ex	-1...3 bar	1 mbar	003
	-1...30 bar	10 mbar	030
	-1...60 bar	10 mbar	060
	0...300 bar	100 mbar	300
	0...700 bar	200 mbar	700
L-Ex	-1...2 bar (relative)	0.1 mbar	002R
	-1...10 bar (relative)	1 mbar	010R
	-1...20 bar (relative)	1 mbar	020R
	0...3 bar (absolute)	0.1 mbar	003A
	0...11 bar (absolute)	1 mbar	011A
	0...21 bar (absolute)	1 mbar	021A
	0...200 bar (absolute)	10 mbar	200R
	0...400 bar (absolute)	50 mbar	400R
	0...700 bar (absolute)	100 mbar	700R
	0...1000 bar (absolute)	100 mbar	01KR
Example order number			EME8REF-D-EX 030

Accessories

Accessories	Order number
SIKA-Works calibration certificate, 10 calibration points (no vacuum)	EKDRUCK000000W
DAkKS calibration certificate, 10 calibration points (no vacuum)	EKDRUCK000000D
Rubber protection cap	XP0229
Measuring point designation	
<p>Laser-inscribed stainless steel plate with fixing wire for easy attachment to measuring points</p> <p>→ Scope of delivery: Designation plate inscribed according to specification and enclosed fixing wire (sealing wire)</p> <p>→ Fastening: Wire (included in delivery), alternatively sealing, cable ties or similar (not included in delivery)</p> <p>→ Materials: Plate stainless steel 1.4571, wire stainless steel</p> <p>→ Dimensions: Plate 55 x 10 x 0.8 mm, wire length 180 mm</p> <p>→ Inscription: one-sided, single-line, max. 11 characters, character height 5 mm, designation width max. 40 mm, letters, numbers, symbols, barcodes, QR codes</p> <p>→ Transmission of designations: digital list, file formats Excel, Word or CSV</p>	<p>ONSITETAG</p>
	

Technical datasheet

10/2023 // V1.2

3 // 3

SIKA Dr. Siebert & Kühn GmbH & Co. KG
 Struthweg 7-9 // 34260 Kaufungen // Germany
www.sika.net



株式会社 クローネ

本社：〒124-0023 東京都葛飾区東新小岩3丁目9番6号 TEL: (03) 3695-5431 / FAX: (03) 3695-5698
 大阪支店：〒530-0054 大阪市北区南森町2-2-9(南森町八千代ビル7F) TEL: (06) 6361-4831 / FAX: (06) 6361-9360

e-mail: sales-tokyo@krone.co.jp URL: <https://www.krone.co.jp>

■ カタログに掲載してある製品の色は印刷インキの関係上、実際とは異なる場合があります。
 ■ 製品のデザイン、仕様等などは、予告なく変更する場合があります。